

Smart In-Wall Outlet SP2610ZB



Incandescent: 960 W



Electronic ballast: 500 VA



Resistive: 1800 W



Motor: 0.5 HP












■ FFATURES*

- · Detects the connected load
- Allows remote control, monitoring, and programming of any appliance or lighting connected to the smart in-wall outlet
- Integrates directly with the Echo Show and Amazon Echo Plus
- * These features are available in Neviweb and Neviweb Premium and require the GT130 hub. Features may vary from a platform to another.



COMMUNICATION

Protocol: Zigbee HA 1.2 Frequency: 2.4 GHz Transmission power: +8

Transmission power: +8 dBm Encryption key: AES-128

CERTIFICATION



STANDARDS

Conforms to UL 60730-1 / CSA E60730-I



- Automations: create automations that run based on time, sunrise/sunset, device action, or your presence
- **Scenes:** activate personalized ambiances according to the time of the day, events or activity
- Energy reports: see your consumption and savings in real-time
- Geofencing: trigger actions based on your presence
- Voice assistants: works with Amazon Alexa and Google Assistant
- * Discover more features: sinopetech.com

SPECIFICATIONS

Operating voltage: 120 Vac, 60 Hz

Maximum load: 960 W: Incandescent 1800 W: Resistive 500 VA: Electronic ballast


1/2 HP: Motor

Operating temperature: 0 °C to 40 °C (32 °F to 104 °F)

Storage: 20 °C to 50 °C (-4 °F to 122 °F)

*Only the identified outlet can be controlled remotely.
Wall plate included
3-year warranty

Indoor installation only.

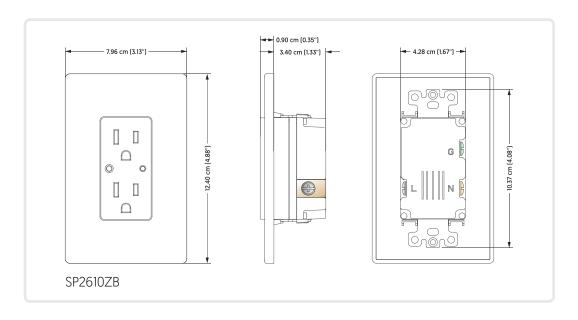

sinopé

T: 450.741.7700 **TF:** 1.855.741.7701

sinopetech.com - sales@sinopetech.com Saint-Jean-sur-Richelieu, Qc, Canada